

Side-mounted turn signals

Side-mounted turn signals, removing and installing


CAUTION!

Disconnect the battery Ground (GND) strap before working on the electrical system.

Notes:

- ◆ Before disconnecting the battery determine the correct coding for the anti-theft radio.
- ◆ After reconnecting the battery, check and activate the vehicle's electrical equipment (radio, clock, comfort and convenience features, etc.) as outlined in this Repair Manual or the Owner's Manual.

Removing

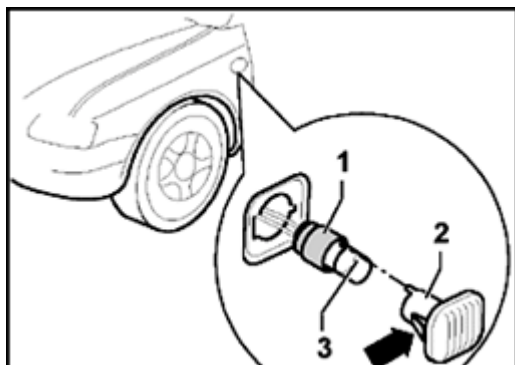

A

- Press side turn signal lens against retaining tab in direction of arrow and carefully remove from fender opening.
- Carefully pull housing -2- out of rubber socket -1-.
- Bulb -3- can be pulled out of rubber socket -1- for replacement.

Installing

- Install in reverse order of removal.